



# UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/707,949	01/27/2004	Yu-Chieh Lin	PMXP0171USA	1948

27765 7590 04/06/2006

NORTH AMERICA INTELLECTUAL PROPERTY CORPORATION  
P.O. BOX 506  
MERRIFIELD, VA 22116

EXAMINER
----------

QUIETT, CARRAMAH J

ART UNIT	PAPER NUMBER
----------	--------------

2622

DATE MAILED: 04/06/2006

Please find below and/or attached an Office communication concerning this application or proceeding.

<b>Office Action Summary</b>	<b>Application No.</b>	<b>Applicant(s)</b>	
	10/707,949	LIN, YU-CHIEH	
	<b>Examiner</b>	<b>Art Unit</b>	
	Carramah J. Quiett	2622	

**-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --**

### Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

### Status

- 1) ☒ Responsive to communication(s) filed on 26 January 2006.
- 2a) ☐ This action is **FINAL**.                      2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

### Disposition of Claims

- 4) ☒ Claim(s) 1-6,8-16,18-20 and 23-28 is/are pending in the application.
- 4a) Of the above claim(s) 4-6,9-11 and 19 is/are withdrawn from consideration.
- 5) ☐ Claim(s) \_\_\_\_\_ is/are allowed.
- 6) ☒ Claim(s) 1-3,8,12-16,18, 20, and 23-28 is/are rejected.
- 7) ☐ Claim(s) \_\_\_\_\_ is/are objected to.
- 8) ☐ Claim(s) \_\_\_\_\_ are subject to restriction and/or election requirement.

### Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 27 January 2004 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.  
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).  
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

### Priority under 35 U.S.C. § 119

- 12) ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☒ All    b) ☐ Some \* c) ☐ None of:
1. ☒ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. \_\_\_\_\_.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).

\* See the attached detailed Office action for a list of the certified copies not received.

### Attachment(s)

- |   |   |
|---|---|
| 1) <input checked="" type="checkbox"/> Notice of References Cited (PTO-892)             | 4) <input type="checkbox"/> Interview Summary (PTO-413)                     |
| 2) <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948)    | Paper No(s)/Mail Date. _____  |
| 3) <input type="checkbox"/> Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08) | 5) <input type="checkbox"/> Notice of Informal Patent Application (PTO-152) |
| Paper No(s)/Mail Date _____   | 6) <input type="checkbox"/> Other: _____                                    |

**DETAILED ACTION**

***Continued Examination Under 37 CFR 1.114***

1. A request for continued examination under 37 CFR 1.114, including the fee set forth in 37 CFR 1.17(e), was filed in this application after final rejection. Since this application is eligible for continued examination under 37 CFR 1.114, and the fee set forth in 37 CFR 1.17(e) has been timely paid, the finality of the previous Office action has been withdrawn pursuant to 37 CFR 1.114. Applicant's submission filed on 01/26/2006 has been entered.

***Response to Amendment***

2. The amendment(s), filed on 01/26/2006, have been entered and made of record. Claims 1-6, 8-16, 18-20, and 23-28 are pending, claims 4-6, 9-11, and 19 have been withdrawn, claims 7, 17, and 21-22 are canceled.

***Response to Arguments***

3. Applicant's arguments with respect to claims 1-3, 8, 12-13 and 23-24 have been considered but are moot in view of the new ground(s) of rejection.

4. Applicant's arguments filed 01/26/2006 have been fully considered but they are not persuasive.

With respect to claim 14, the Applicant asserts that the following limitation is not taught or suggested by the combination:

a lens installed on the housing, moveable between a first position and a second position for inputting light from the front of the housing in the first position and from the rear of the housing in the second position.

Art Unit: 2622

The Examiner respectfully disagrees. Saari discloses a lens (32) installed in the housing, moveable between a first position and a second position, for inputting light from the front of the housing in the first position and from the rear of the housing in the second position. Please read col. 4, lines 41-46; col. 5, lines 27-47. As illustrated in fig. 3, Motta discloses a lens (25/26) installed on a housing, which is moveable between a first position and a second position (fig. 3; col. 3, lines 42-57). Modifying Saari's digital image capturing apparatus with a lens installed on the housing, moveable between a first position and a second position provides a user with an adjustable focus option for producing clear sharp digital images (Motta, col. 3, lines 59-66).

***Claim Rejections - 35 USC § 103***

5. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

6. **Claims 1, 8, 12-13, 23-24, and 27-28** are rejected under 35 U.S.C. 103(a) as being unpatentable over Saari et al. (U.S. Pat. 6,532,035) in view of Kuroda (U.S. Pat. App. Pub. 2003/0036365) and Belliveau (U.S. Pat. App. Pub. 2004/0114043).

For **claim 1**, Saari discloses (figs. 1-3 and 5) a digital image capturing apparatus (10) comprising:

a housing (12)/(col. 4, lines 21-24);

a first hole (38) installed on the front side of the housing for inputting light from the front, the first hole (inherently) having a first central axis (col. 4, lines 46-49);

Art Unit: 2622

a second hole (50) installed on the rear side of the housing for inputting light from the rear (col. 5, lines 38-41);

a reflector module (116) installed in the housing for reflecting the light input from the first hole or\* the second hole (col. 6, lines 10-18), the reflector module (fig. 10) comprises:

a pedestal turning (86) on a second axis (col. 7, lines 22-36);

a reflector (84) installed on a side of the pedestal for reflecting the light from the first hole or the second hole to the photosensor (col. 7, lines 22-36 and fig. 5);

a photosensor (fig. 10, ref. 72) installed in the housing for sensing the light from the reflector module (col. 7, lines 22-27); and

an image generating module (inherently) installed in the housing for generating an image according to the light sensed by the photosensor (col. 5, lines 27-34 and 40-47). Saari inherently teaches an image generating module installed in the housing because in photography mode a captured image can be displayed on the screen (fig. 1, ref. 16).

Saari also teaches that image capturing apparatus (10) in fig. 2 has a camera assembly that is rotated to a position that captures the image of the user as the user holds the apparatus. However, Saari does not expressly teach the second hole having a central axis substantially parallel with the first central axis. In a similar field of endeavor, Kuroda teaches a second hole (fig. 7, ref. 10a) having a central axis substantially parallel (inherently) with the first central axis (page 3, pgphs. 36-37). In light of the teaching of Kuroda, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a second hole having a central axis substantially parallel with the first

Art Unit: 2622

central axis in order to provide an apparatus that is capable of capturing images on a front side and a rear side of the apparatus (Kuroda, page 1, pgph. 8).

Additionally, Saari does not disclose a strobe installed on the pedestal and turnable with the pedestal allowing the strobe to be aimed substantially parallel with the first central axis in either direction for providing a light source necessary for the digital image capturing apparatus. In a similar field of endeavor, Belliveau discloses a digital image capturing apparatus wherein the reflector module (figs. 3/5, ref. 230) comprises: a strobe (345) installed on a pedestal (225) and turnable with the pedestal (pg. 3, pgph. 33) allowing the strobe to be aimed substantially parallel (380) with the first central axis (351) in either direction for providing a light source necessary for the digital image capturing apparatus (pg. 4, pgph. 39). In light of the teaching of Belliveau, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a strobe installed on a pedestal in order to provide adequate projection of the image into the camera (photosensor) (Belliveau, pg. 3, pgph. 33).

For **claim 8**, Saari, as modified by Kuroda and Belliveau, teaches that the flat mirror (Saari, reflector) is pivoted to fold or bend the optical path as illustrated by the dash line in fig. 10 (Saari, col. 7, lines 28-30). As shown in Saari, fig. 10, the projection of the image (74) creates a right triangle with the mirror, which is traced out by the dotted lines. However, Saari and Belliveau do not expressly disclose a digital image capturing apparatus wherein the acute angle formed by the second axis and the normal line of the reflector is 45 degrees. Examiner takes Official Notice that is well known in the art for the acute angle formed by the second axis and the normal line of the reflector is 45 degrees. It would have been obvious to one of ordinary



Art Unit: 2622

skill in the art at the time the invention was made to implement Saari's digital image capturing apparatus, as modified by Belliveau, with an acute angle formed by the second axis and the normal line of the reflector is 45 degrees in order to adequately focus the image signals into the image sensor via the lens.

For **claim 12**, Saari, as modified by Kuroda and Belliveau, inherently discloses a digital image capturing apparatus wherein both the first hole and the second hole are installed with at transparent material (Saari, col. 4, lines 47-64). Saari teaches that a close-up lens (36), mounted within the recess (38), is made of transparent plastic. Saari also teaches that other parts of the terminal are made of this material (col. 4, lines 59-64).

For **claim 13**, Saari, as modified by Kuroda and Belliveau, discloses a digital image capturing apparatus (fig. 1, ref. 10) being a *digital camera\** or a digital camcorder. Saari teaches that the mobile communication terminal (10) has a photography mode, which allows the terminal to serve as a digital camera (col. 5, lines 35-47).

For **claim 23**, Saari, as modified by Kuroda and Belliveau, the digital image capturing wherein the second axis is inherently perpendicular to a shortest line connecting the front side of the housing to the rear side of the housing (Saari, figs. 8/10; col. 7, lines 1-36).

For **claim 24**, Saari, as modified by Kuroda and Belliveau, teaches that the flat mirror (Saari, reflector) is pivoted to fold or bend the optical path as illustrated by the dash line in fig. 10 (Saari, col. 7, lines 28-30). As shown in Saari, fig. 10, the projection of the image (74) creates a right triangle with the mirror, which is traced out by the dotted lines. However, Saari and Belliveau do not expressly disclose the digital image capturing apparatus wherein an angle formed by the second axis and a normal line of the reflector is 45 degrees, and an angle formed

Art Unit: 2622

by the second axis and a line along which the strobe is aimed is 90 degrees. Examiner takes Official Notice that is well known in the art for an angle formed by the second axis and the normal line of the reflector is 45 degrees, and an angle formed by the second axis and a line along which the strobe is aimed is 90 degrees. It would have been obvious to one of ordinary skill in the art at the time the invention was made to implement Saari's digital image capturing apparatus, as modified by Belliveau, with an angle formed by the second axis and the normal line of the reflector is 45 degrees, and an angle formed by the second axis and a line along which the strobe is aimed is 90 degrees in order to adequately focus the image signals into the image sensor via the lens.

For **claim 27**, Saari, as modified by Kuroda and Belliveau, teaches the digital image capturing apparatus, wherein the second axis is (inherently) perpendicular to the first central axis. Please see Saari, fig. 8 and col. 7, lines 1-2.

For **claim 28**, Saari discloses (figs. 1-3 and 5) a digital image capturing apparatus (10) comprising:

a housing (12) having a front side and an opposite rear side (col. 4, lines 21-24 and 46-49), and inherently a first central axis (col. 4, lines 46-49);

a reflector module (116) installed in the housing for reflecting light input at the front side of the housing when the reflector module is in a first position and for reflecting light input at the rear side of the housing when the reflector module is in a second position (col. 4, lines 46-49; col. 6, lines 10-18), the reflector module comprising:



a pedestal turning on a second axis (86) on a second axis (col. 7, lines 22-36), the second axis being inherently perpendicular to the first central axis, the pedestal turning between the first and second positions; Please see Saari, fig. 8 and col. 7, lines 1-2.

a reflector (84) installed on the pedestal and turnable with the pedestal allowing for reflecting light from the front or rear side of the housing to the photosensor (col. 7, lines 22-36 and fig. 5); and

a photosensor (fig. 10, ref. 72) installed in the housing for sensing the light from the reflector module (col. 7, lines 22-27); and

an image generating module (inherently) installed in the housing for generating an image according to the light sensed by the photosensor (col. 5, lines 27-34 and 40-47). Saari inherently teaches an image generating module installed in the housing because in photography mode a captured image can be displayed on the screen (fig. 1, ref. 16).

Saari also teaches that image capturing apparatus (10) in fig. 2 has a camera assembly that is rotated to a position that captures the image of the user as the user holds the apparatus. However, Saari does not expressly teach a first central axis as a shortest line connecting the front side and the rear side. In a similar field of endeavor, Kuroda inherently teaches a first central axis (fig. 7) as a shortest line connecting the front side and the rear side (page 3, pgphs. 36-37). In light of the teaching of Kuroda, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a first central axis as a shortest line connecting the front side and the rear side in order to provide an apparatus that is capable of capturing images on a front side and a rear side of the apparatus (Kuroda, page 1, pgph. 8).

Art Unit: 2622

Additionally, Saari does not disclose a strobe installed on the pedestal and turnable with the pedestal allowing the strobe to be aimed substantially parallel with the first central axis in either direction for providing a light source necessary for the digital image capturing apparatus. In a similar field of endeavor, Belliveau discloses a digital image capturing apparatus wherein the reflector module (figs. 3/5, ref. 230) comprises: a strobe (345) installed on a pedestal (225) and turnable with the pedestal (pg. 3, pgph. 33) allowing the strobe to be aimed substantially parallel (380) with the first central axis (351) in either direction for providing a light source necessary for the digital image capturing apparatus (pg. 4, pgph. 39). In light of the teaching of Belliveau, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a strobe installed on a pedestal in order to provide adequate projection of the image into the camera (photosensor) (Belliveau, pg. 3, pgph. 33).

7. **Claims 2-3** are rejected under 35 U.S.C. 103(a) as being unpatentable over Saari et al. (U.S. Pat. 6,532,035) in view of Kuroda (U.S. Pat. App. Pub. 2003/0036365) and Belliveau (U.S. Pat. App. Pub. 2004/0114043) as applied to claim 1 above, and further in view of Motta et al. (U.S. Pat. 6,809,772).

For **claim 2**, Saari, as modified by Kuroda and Belliveau, discloses a digital image capturing apparatus further comprising (fig. 10) a lens (70) installed between the reflector module (84) and the photosensor (72) for focusing the light from the reflector module onto the photosensor (Saari, col. 7, lines 22-36). However, Saari does not disclose a lens group installed

Art Unit: 2622

between the reflector module (42) and the photosensor for focusing the light from the reflector module onto the photosensor.

In a similar field of endeavor, Motta discloses a digital image capturing apparatus (fig. 3, ref. 20) further comprising a lens group (25/26) (fig. 3; col. 3, lines 42-57). In light of the teaching of Motta, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus by substituting the lens for a lens group, which provides a user with an adjustable focus option for producing clear sharp digital images (Motta, col. 3, lines 59-66).

For **claim 3**, Saari, as modified by Kuroda and Belliveau, discloses a digital image capturing apparatus further comprising (Saari, figs. 5/10) a first lens (Saari, fig. 10, ref. 70) installed between the first hole (Saari, fig. 5, ref. 124) and the reflector module (Saari, fig. 10, ref. 84) for focusing the light from the first hole onto the photosensor (Saari, fig. 10, ref. 72), and a second lens (Saari, fig. 10, ref. 76) installed between the second hole (Saari, fig. 5, ref. 108) and the reflector module (Saari, fig. 10, ref. 84) for focusing the light from the second hole onto the photosensor (Saari, fig. 10, ref. 72). Please read Saari, col. 6, lines 8-24 and (col. 7, lines 22-36). Saari does not expressly disclose a first lens group installed between the first hole and the reflector module for focusing the light from the first hole onto the photosensor, and a second lens group installed between the second hole and the reflector module for focusing the light from the second hole onto the photosensor.

In a similar field of endeavor, Motta discloses a digital image capturing apparatus (fig. 3, ref. 20) further comprising a lens group (25/26) (fig. 3; col. 3, lines 42-57). In light of the teaching of Motta, it would have been obvious to one of ordinary skill in the art at the time the

Art Unit: 2622

invention was made to modify Saari's digital image capturing apparatus by substituting the lens for a lens group, which provides a user with an adjustable focus option for producing clear sharp digital images (Motta, col. 3, lines 59-66).

8. **Claims 14-18, 20, and 25-26** are rejected under 35 U.S.C. 103(a) as being unpatentable over Saari et al. (U.S. Pat. 6,532,035) in view of Motta et al. (U.S. Pat. 6,809,772) and Belliveau (U.S. Pat. App. Pub. 2004/0114043).

For **claim 14**, Saari discloses (figs. 1-3 and 5) a digital image capturing apparatus (10) comprising:

a housing (12) (col. 4, lines 21-24);

a lens (32) installed in the housing, moveable between a first position and a second position, for inputting light from the front of the housing in the first position and from the rear of the housing in the second position (col. 4, lines 41-46; col. 5, lines 27-47);

a reflector module (116) installed in the housing for reflecting the light input from the lens (col. 6, lines 10-18), the reflector module (fig. 10) comprising:

a pedestal turning (Saari, fig. 10, ref. 86) on a second axis (Saari, col. 7, lines 22-27);

a reflector (Saari, fig. 10, ref. 84) installed on a side of the pedestal for reflecting the light from the lens to the photosensor (Saari, col. 7, lines 22-27 and fig. 5).

a photosensor (fig. 10, ref. 72) installed in the housing for sensing the light from the reflector module (col. 7, lines 22-27); and

an image generating module installed in the housing for generating an image according to the light sensed by the photosensor. (col. 5, lines 27-34 and 40-47). Saari teaches an image

Art Unit: 2622

generating module installed in the housing because in photography mode a captured image can be displayed on the screen (fig. 1, ref. 16).

However, Saari does not expressly disclose a lens (36) installed on the housing, moveable between a first position and a second position. In a similar field of endeavor, Motta discloses a lens (25/26) installed on a housing, moveable between a first position and a second position (fig. 3; col. 3, lines 42-57). In light of the teaching of Motta, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a lens installed on the housing, moveable between a first position and a second position to provide a user with an adjustable focus option for producing clear sharp digital images (Motta, col. 3, lines 59-66).

Additionally, Saari and Motta do not expressly disclose a strobe installed on the pedestal and turnable with the pedestal allowing the strobe to be aimed substantially parallel with the first central axis in either direction for providing a light source necessary for the digital image capturing apparatus. In a similar field of endeavor, Belliveau discloses a digital image capturing apparatus wherein the reflector module (figs. 3/5, ref. 230) comprises: a strobe (345) installed on a pedestal (225) and turnable with the pedestal (pg. 3, pgph. 33) allowing the strobe to be aimed substantially parallel (380) with the first central axis (351) in either direction for providing a light source necessary for the digital image capturing apparatus (pg. 4, pgph. 39). In light of the teaching of Belliveau, it would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a strobe installed on a pedestal in order to provide adequate projection of the image into the camera (photosensor) (Belliveau, pg. 3, pgph. 33).

For **claim 15**, Saari, as modified by Motta and Belliveau, discloses a digital image capturing apparatus (Motta, fig. 3, ref. 20) further comprising a lens group (Motta, fig. 3, refs. 25/26) (Motta, fig. 3; col. 3, lines 42-66).

For **claim 16**, Saari, as modified by Motta and Belliveau, discloses a digital image capturing apparatus wherein the reflector module is installed in the housing. However, he does not expressly disclose a digital image capturing apparatus wherein the reflector module is *capable of\*\** moving along with the lens. Official Notice is taken in that it is well known in the art for a reflector module, in a digital image capturing apparatus, to *be capable of\*\** moving along with the lens. It would have been obvious to one of ordinary skill in the art at the time the invention was made to modify Saari's digital image capturing apparatus with a reflector module that is *capable of\*\** moving along with the lens to ensure that the image light can enter the image pickup element perpendicularly.

For **claim 18**, Saari, as modified by Motta and Belliveau, teaches that the flat mirror (Saari, reflector) is pivoted to fold or bend the optical path as illustrated by the dash line in fig. 10 (Saari, col. 7, lines 28-30). As shown in Saari, fig. 10, the projection of the image (74) creates a right triangle with the mirror, which is traced out by the dotted lines. However, Saari does not expressly disclose a digital image capturing apparatus, wherein the acute angle formed by the fourth axis and the normal line of the reflector is 45 degrees. Examiner takes Official Notice that is well known in the art for the acute angle formed by the second axis and the normal line of the reflector is 45 degrees. It would have been obvious to one of ordinary skill in the art at the time the invention was made to implement Saari's digital image capturing apparatus, as modified by Motta, with an acute angle formed by the second axis and the normal line of the



Art Unit: 2622

reflector is 45 degrees in order to adequately focus the image signals into the image sensor via the lens.

For **claim 20**, Saari as modified by Motta and Belliveau, discloses a digital image capturing apparatus (Saari, fig. 1, ref. 10) being *a digital camera\** or a digital camcorder. Saari teaches that the mobile communication terminal (10) has a photography mode, which allows the terminal to serve as a digital camera (col. 5, lines 35-47).

For **claim 25**, Saari as modified by Motta and Belliveau, discloses the digital image capturing apparatus wherein the second axis is perpendicular to a shortest line connecting the front side of the housing to the rear side of the housing (Saari, figs. 8/10; col. 7, lines 1-36).

For **claim 26**, Saari as modified by Motta and Belliveau, teaches that the flat mirror (Saari, reflector) is pivoted to fold or bend the optical path as illustrated by the dash line in fig. 10 (Saari, col. 7, lines 28-30). As shown in Saari, fig. 10, the projection of the image (74) creates a right triangle with the mirror, which is traced out by the dotted lines. However, Saari, Motta, and Belliveau do not expressly disclose the digital image capturing apparatus wherein an angle formed by the second axis and a normal line of the reflector is 45 degrees, and an angle formed by the second axis and a line along which the strobe is aimed is 90 degrees. Examiner takes Official Notice that is well known in the art for an angle formed by the second axis and the normal line of the reflector is 45 degrees, and an angle formed by the second axis and a line along which the strobe is aimed is 90 degrees. It would have been obvious to one of ordinary skill in the art at the time the invention was made to implement Saari's digital image capturing apparatus, as modified by Motta and Belliveau, with an angle formed by the second axis and the normal line of the reflector is 45 degrees, and an angle formed by the second axis and a line

Art Unit: 2622

along which the strobe is aimed is 90 degrees in order to adequately focus the image signals into the image sensor via the lens.

---

**\*Note:** The U.S. Patent and Trademark Office considers Applicant's "or" language to be anticipated by any reference containing one of the subsequent corresponding elements.

**\*\*Note:** The U.S. Patent and Trademark Office considers the Applicant's phrases such as "...a lens being *capable of* moving back and forth..." and "...a strobe installed on the pedestal and being *capable of* turned along with the pedestal..." as used in the claims broadens the scope of the claims. If a limitation is written with "capable of" language, a reference is deemed to meet that limitation if the reference discusses the same element that, although not actually performing the claimed function, is **structurally capable** of performing it.

### ***Conclusion***

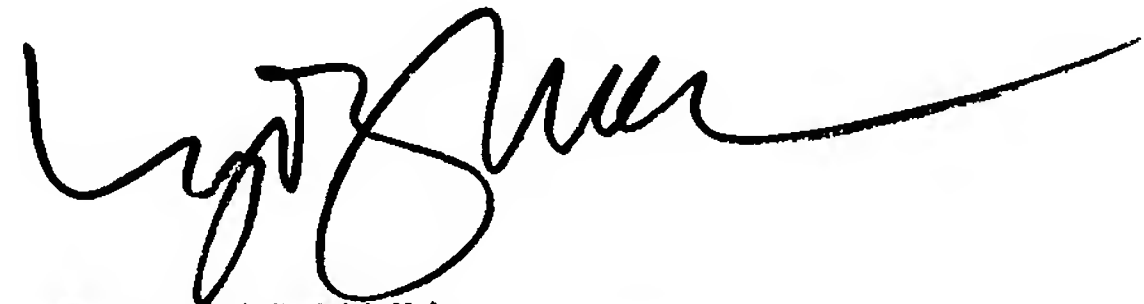
Any inquiry concerning this communication or earlier communications from the examiner should be directed to Carramah J. Quiett whose telephone number is (571) 272-7316. The examiner can normally be reached on 8:00-5:00 M-F.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, NgocYen Vu can be reached on (571) 272-7320. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Art Unit: 2622

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

CJQ  
April 3, 2006

A handwritten signature in black ink, appearing to read 'Ngoc-Yen Vu', with a long horizontal flourish extending to the right.

NGOC-YEN VU  
SUPERVISORY PATENT EXAMINER